


ASSEMBLY AND INSTALLATION INSTRUCTIONS

OW24963 / OW35653 / OW35053

WARNING: TO AVOID RISK OF ELECTRIC SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: Before installing, consult local electrical codes for wiring and grounding requirements.

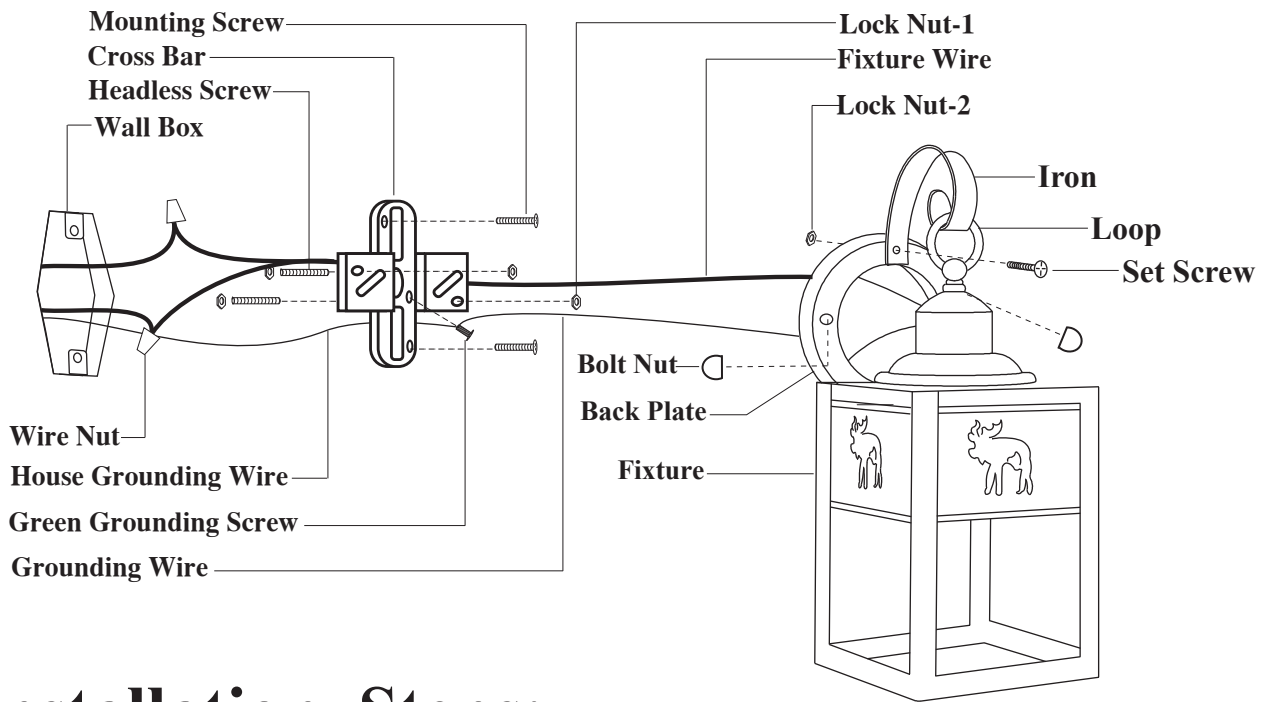

Installation Steps:

1. Thread two Headless Screws to the Cross Bar, and then secure with two Lock Nuts-1.
2. Attach the Cross Bar to Wall Box by using two Mounting Screws.
3. Hook the Iron to the Loop, and then attach the Iron to the Back Plate by using the Set Screw and the Lock Nut-2.
4. Make wire connections with Wire Nut:
 - Black wire from fixture to black wire from power source.
 - White wire from fixture to white wire from power source.
 - Attach the Grounding wire and House Grounding wire to the Cross Bar with a Green Grounding screw.Carefully tuck wires back into the Wall Box.
5. Attach the Back Plate to the Cross Bar by inserting the Headless Screws, and then secure with the Bolt Nuts.
6. Install a bulb. **(Please do not exceed the maximum capacity which is recommended on the socket.)**
7. Turn on the power at fuse or circuit box.